

Computational Fluid Dynamics (CFD) Analysis of Different Sizes of Savonius Rotor Wind Turbine

Muhammad Nur Arham Bajuri¹, Djamal Hissein Didane^{2,*}, Mahamat Issa Boukhari³, Bukhari Manshoor²

¹ Department of Mechanical Engineering, Faculty of Mechanical and Manufacturing Engineering, Universiti Tun Hussein Onn Malaysia (UTHM), Parit Raja, 86400 Batu Pahat, Johor, Malaysia

² Center for Energy and Industrial Environment Studies, Faculty of Mechanical and Manufacturing Engineering, Universiti Tun Hussein Onn Malaysia (UTHM), Parit Raja, 86400 Batu Pahat, Johor, Malaysia

³ National Institut of Sciences and Technologies of Abéché, Abéché, Chad

ABSTRACT

Wind energy is one of many renewable energy sources available. This energy is environmentally friendly green energy. Wind turbines can act as electric generators when the wind passes through them. It's also an alternative to burning fossil fuels or carbon, which can harm the environment in terms of gas emissions. According to the data, wind power is one of the fastest-growing sources of electricity. The primary goal of this study is to evaluate the Savonius Rotor wind turbine's performance in terms of aerodynamic characteristics, including torque, torque coefficient, and power coefficient. The design of Savonius wind turbine blades is the subject of this study. The size of wind turbine blades significantly impacts how efficiently they generate electricity. Ensuring the wind turbine can efficiently work requires the proper selection of blade size for the Savonius wind turbine. The blade modeling used Solidworks 2021 and then generates in Ansys Design Modeler 2021 R1 to define the fluid domain. In addition, a CFD study with three distinct turbine blades is performed using FLUENT 2021 R21. A constant wind speed value of 9.2 m/s has been used throughout the simulation. The simulation was carried out using a transient time flow with a constant upstream wind speed. The results have shown that the power coefficient of all models increases with TSR and the highest efficiency is consensually obtained at almost a unity (0.9) TSR. Comparing the performance of all models, Model 2 generates the highest power coefficient followed by Model 3 and Model 1, respectively. In terms of power, torque and torque coefficient, nearly similar conclusion is drawn.

Keywords:

Savonius Wind turbine; 3D simulations;
CFD ANSYS Fluent; Torque coefficient;
Power coefficient

Received: 16 March 2022

Revised: 31 March 2022

Accepted: 15 May 2022

Published: 13 July 2022

1. Introduction

The evolution of renewable energy has improved significantly over the previous decade. Currently, renewable energy is an alternative to non-renewable. Human activity now pollutes the atmosphere with carbon dioxide, greenhouse gases, and other pollutants. Using non-renewable energy has caused the atmosphere to blanket and trap heat. This includes increased storm frequency, drought, sea level rise, and extinction. Unlike non-renewable energy, most renewable energy sources emit little or no CO₂. Even when including "life cycle" emissions of clean energy (for example, the

* Corresponding author.

E-mail address: djamal@uthm.edu.my

emissions from each stage of a technology's life manufacturing, installation, operation, decommissioning), the global warming emissions associated with renewable energy are minimal [1]. Solar, hydro, wind, geothermal, tidal, and biomass energy are examples of renewable energy sources that can supply sustainable energy services using everyday available and indigenous resources. It seems hard to cover each country's huge electricity demand with renewable energy alone. Wind energy is a prominent renewable energy source that comes in a variety of sizes [2], [3]. Wind turbines harvest the kinetic energy of the wind to generate mechanical power. This mechanical force can be used for certain tasks, or a generator can be used to power dwellings. Wind turbines harness the power of moving air to power an electric generator. A wind turbine resembles a fan. Unlike fans, wind turbines use the wind to generate power [4]. Horizontal-axis wind turbines (HAWTs) and vertical-axis wind turbines (VAWTs). Since horizontal axis wind turbines can generate more electricity from less wind, they have dominated the wind industry. Although heavier, horizontal axis wind turbines perform poorly in turbulent conditions. The vertical axis wind turbine is more compact and can accommodate reduced electrical demand. In modest wind projects in residential areas, vertical axis turbines are common. This wind turbine can produce well in turbulent wind conditions from any direction. Moreover, vertical axis wind turbines are the best choice for installations with variable wind conditions [5].

The Savonius wind turbine is a VAWT. Sigurd J. Savonius invented wind turbines in 1922. Savonius Rotor wind turbines were first commercialized in the 1920s. Savonius wind turbines are propelled by drag. This wind turbine's aerodynamic efficiency is lower than other wind turbines like the Darrieus rotor. However, Savonius rotors are reliable and straightforward, with strong starting torque and no wind direction issues [6], [7]. However, compared to the horizontal axis wind turbine (HAWT), the vertical axis wind turbine (VAWT) receives less attention (HAWTs). The design research is sparse, and the sources are unreliable. It is true, VAWTs cannot be compared to HAWTs, even though VAWTs have their advantages. The VAWTs rotor performance is lower than HAWTs, which shows that it needs to be enhanced to make the VAWTs type equal to HAWTs type.

Thus, over the years there were many efforts to enhance the aerodynamic performance of VAWTs to harvest more electrical energy from the wind including rotor design and robustness of the blade, adding another rotor such counter-rotating technique or adding more blades such as multi-stage or inner blades using both computational and experimental techniques [8]–[12]. Furthermore, the Savonius wind turbine's blade design contributes to its performance. The simple blade design of the Savonius wind turbine has its advantages. Adding fins to the Savonius wind turbine blades, altering the number of blades, and attaching external overlap have been studied to improve performance [13]. It was discovered that doubling the blade diameter of a Savonius wind turbine doubled the output [14]. The amount of wind caught increases with blade size. However, the power output does not increase accordingly. One of the advantages of Savonius wind turbines is that they can capture wind from any direction and rotate slowly. Its blades revolve because of the drag force pressing on them.

Currently, there are so many kinds of design of Savonius wind turbine. However, in this study, the design process for the Savonius-type wind turbine begins with preliminary sketching by referring to the previous study by Lee Jae-Hoon [15] and modify this design to improve its performance. Thus, the major purpose of this work is to maximize wind energy harvesting and rotational mechanical electric generation of Savonius rotors. The rotor blade is varied and the performance of each size is observed and compared in terms of maximum lift coefficient of three rotor sizes. The simulation is performed in 3D models using Fluent solver while achieving parameters such as lift, drag, and torque efficiency. Moreover, the performance of Savonius rotor in terms of aerodynamic characteristics such

as torque, torque coefficient, power and power coefficient are compared with different sizes of the turbine blade.

2. Methods

2.1 Selection and modelling of blade

The models investigated in this study is Savonius wind turbine with three different sizes of the blade which is the first model with the height and diameter of 1 m and 0.4 m, the second model with the height and diameter of 0.75 m and 0.3 m, and the third model with the height and diameter of 0.5m and 0.2m, respectively. The design of the rotor consists of two blades. The height is changed to obtain the different diameters of the Savonius wind turbine. After the modelling phase is complete, the process continued to the next step, which is solving the model in the simulation software.

2.2 Boundary conditions and Flow solver

This study consists of several boundary conditions, namely, inlet, outlet, boundaries wall, blade wall, and interface. The velocity inlet with steady distribution is applied at the inlet at the direction of the z-axis, and pressure outlet boundary conditions are assigned along the z-axis directly opposite to the velocity inlet boundary conditions. The wall boundary condition with a no-slip condition is applied to the blade wall, and the symmetrical wall boundary condition is assigned at the boundaries wall. For this study, there are two interfaces, which are interface-in and interface-out created around the blades separated by a certain distance. There is also a rotating and non-rotating interface where the magnitude and direction of the velocity can be applied to the rotating interface. The SIMPLE algorithm was used for the pressure-velocity coupling scheme for the solution method.

3. Results and Discussion

3.1 Comparison of torque coefficient

Primarily in a wind turbine, the performance of the wind turbine is usually determined by aerodynamic characteristics such as the torque, torque coefficient, power, and power coefficient. Torque also can be referred to as the moment of a force. Torque is a force that acts perpendicular to the axis of the rotating blade. The value of torque was obtained through the ANSYS Fluent software. The torque comparison between three models of Savonius wind turbine is presented as in **Error! Reference source not found.** By referring to the comparison graph in Figure 1, the pattern of the graph for all models is the same. The value is constant from TSR 0.5 to 0.9, and the torque decreases from TSR 0.9 to 1.1. Model 3 has the highest torque value, which is 0.5920 at TSR 0.5, followed by model 2, which is 0.3002 at TSR 0.5, and the last one is model 1 with the torque of 0.0753 at TSR 0.5 blade, which could affect the starting capability of the wind turbine, which is not covered in the current study.

Moreover, the relation between torque coefficient and the tip-speed ratio is depicted in the Figure 2. By referring to the comparison graph, the pattern of graph for Models 2 and 3 are the same where the graph pattern is constant from TSR 0.5 to 0.9 and then decreasing from TSR 0.9 to 1.1. The graph pattern for model 1 is different from other models since the pattern decreases from TSR 0.5 to 0.7, constant at TSR 0.7 to 0.9, and then decreases again from TSR 0.9 to 1.1.

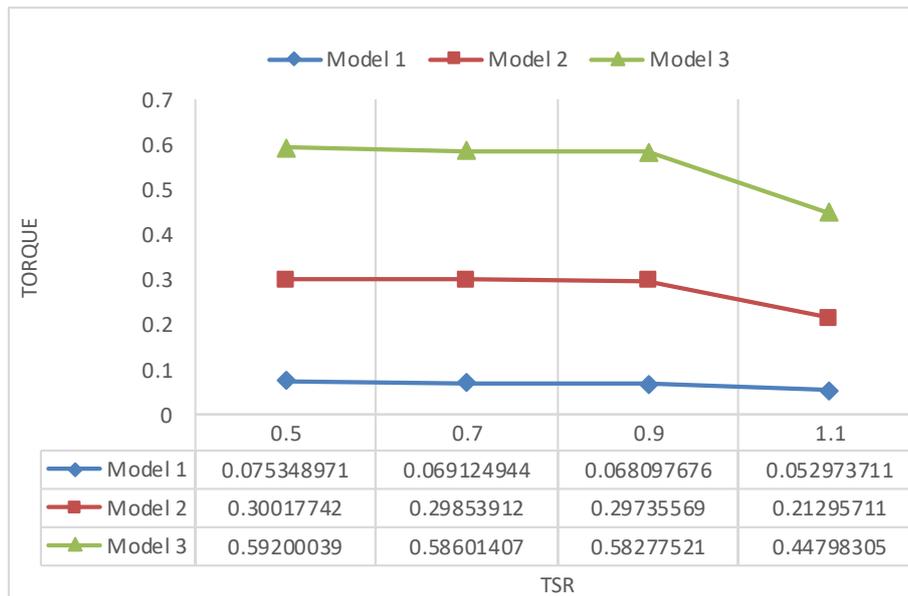


Fig. 1. Torque against the tip-speed ratio for all models

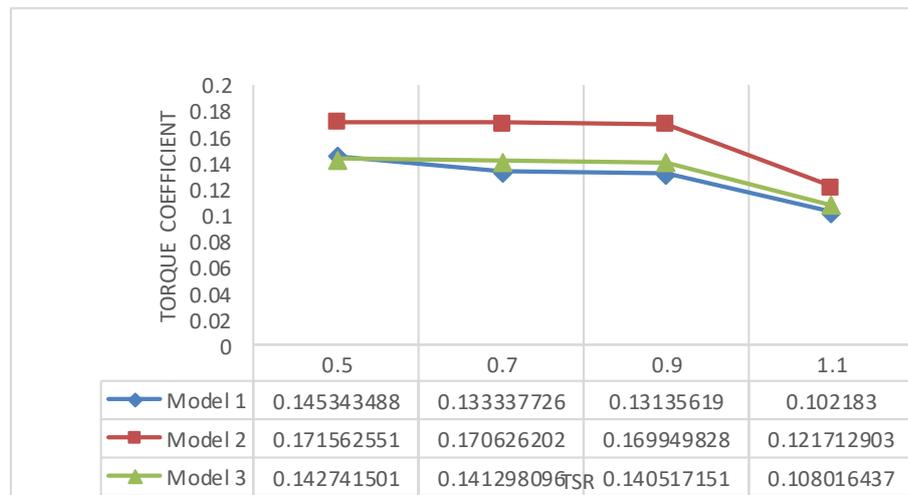


Fig. 2. Torque coefficient against TSR comparison for all models

3.2 Comparison of power and power coefficient

Figure 3 depicts the relationship between power and tip-speed ratio. The highest power generated by all models is 24.13Watt. Followed by 22.67Watt, 18.87Watt and 13.62Watt, respectively. All these values are obtained by the Model 3 simulation. Model 3 at the point of (TSR=0.7, 0.9) shows an enhanced performance percentage of 38.54% and 27.87%. Besides, model 2 has improved by 39.08% and 28.10% at TSR of 0.7 and 0.9, respectively, followed by model 1, which has an increment performance percentage of 28.24% and 26.74% at TSR of 0.7 and 0.9. By comparing the peak value of C_p for all models, the difference of 31.99% by model 3 and model 2, while the percentage of model 2 and model 1 is 65.63%.

Furthermore, the Savonius rotor's operation is determined by the lift and drag forces acting on the blades. The amount of these forces can be influenced by factors such as blade angle and blade shape. As a result, each rotor configuration has a unique power coefficient. The C_p of each model is compared for this purpose. **Error! Reference source not found.** depicts the results of 3 models after analysed and plotted, where C_p is a function of TSR. **Error! Reference source not found.** clearly shows

that model 2 with a height of 0.75m and a diameter of 0.3m has the best performance in terms of C_p , followed by model 3 with a height of 1.0m and a diameter of 0.4m, and model 1 with a height of 0.5m and a diameter of 0.2m. Model 2 at the point of (TSR=0.7, 0.9) shows an enhanced performance percentage of 39.16% and 28.14%. Besides, model 3 has improved by 38.52% and 27.91% at TSR of 0.7 and 0.9, respectively, followed by model 1, which has an increment performance percentage of 28.33% and 26.69% at TSR of 0.7 and 0.9. By comparing the peak value of C_p for all models, the difference of 18.96% by model 2 and model 3, while the percentage of model 2 and model 1 is 25.62%.

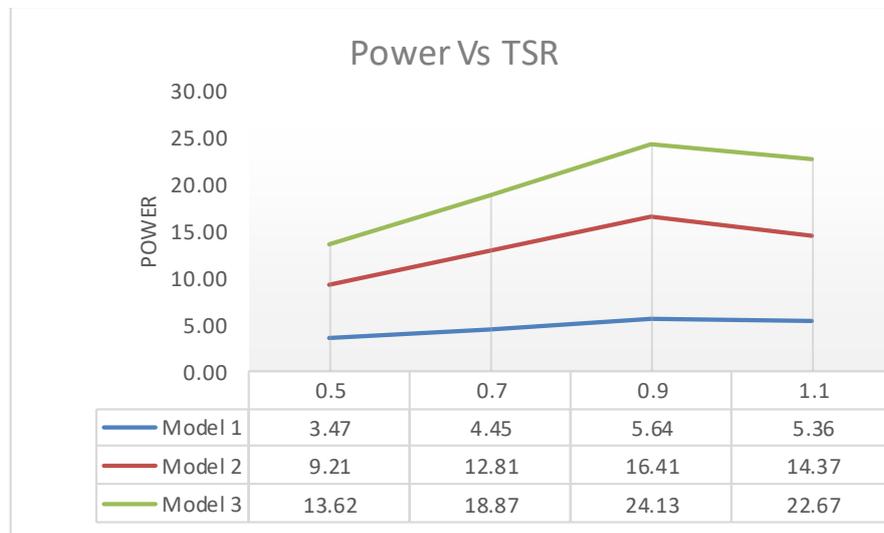


Fig. 3. Power against TSR comparison for 3 models

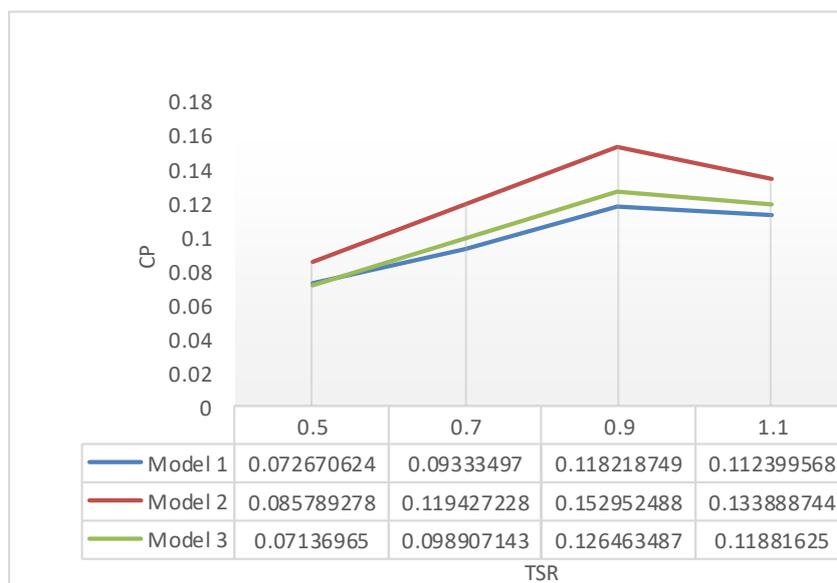


Fig. 4. Comparison of C_p against TSR for 3 Model

4. Conclusion

In this study, the efficiency of the Savonius Rotor wind turbine model was numerically evaluated by using with various blade sizes at 9.2 m/s. The main objective was achieved by testing the performance of Savonius wind turbine and comparing the torque and power output of various rotor sizes at constant wind speed. The results have shown that the power coefficient of all models

increases with TSR and the highest efficiency is consensually obtained at almost a unity (0.9) TSR. Comparing the performance of all models, Model 2 with 0.75 m height and 0.3 m diameter produced the highest power coefficient compared to the other two Savonius wind turbine models, followed by Model 3 and Model 1, respectively. In terms of power, torque and torque coefficient, nearly similar conclusion is drawn. However, the power and power coefficient increase from low TSR until the optimal TSR, while torque and torque coefficient are higher at low TSR and decreases as the TSR increase.

Acknowledgement

The authors would like to acknowledge the financial support provided by the Universiti Tun Hussein Onn Malaysia through the H919 grant.

References

- [1] Perkins, J. H. (2012). Special Report on Renewable Energy Sources and Climate Change Mitigation: 2011. Intergovernmental Panel on Climate Change, Working Group III—Mitigation of Climate Change. Cambridge University Press, Cambridge, England. 1,088 pp. \$100.00 hardcover (ISBN13: 9781107607101). Also available for free at <http://srren.ipcc-wg3.de/report> (ca. 1,544 pp.). <https://doi.org/10.1017/S1466046612000233>
- [2] Al-Ghriybah, M., Zulkafli, M. F., Didane, D. H., & Mohd, S. (2019). Wind energy assessment for the capital city of Jordan, Amman. *Journal of Applied Engineering Science*, 17(3). <https://doi.org/10.5937/jaes17-20241>
- [3] Didane, D. H. (2018). Wind and solar assessment in the sahelian zone of chad. *International Journal of Integrated Engineering*, 10(8). <https://doi.org/10.30880/ijie.2018.10.08.026>
- [4] Woofenden, I. (2016). How a Wind Turbine Works.
- [5] Al-Ghriybah, M., Zulkafli, M. F., Didane, D. H., & Mohd, S. (2019). Review of the recent power augmentation techniques for the Savonius wind turbines. *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, 60(1), 71-84.
- [6] Didane, D. H., Maksud, S. M., Zulkafli, M. F., Rosly, N., Shamsudin, S. S., & Khalid, A. (2020). Performance investigation of a small Savonius-Darrius counter-rotating vertical-axis wind turbine. *International Journal of Energy Research*, 44(12), 9309-9316. <https://doi.org/10.1002/er.4874>
- [7] Didane, D. H., Maksud, S. M., Zulkafli, M. F., Rosly, N., Shamsudin, S. S., & Khalid, A. (2019, June). Experimental Study on the Performance of a Savonius-Darrius Counter-Rotating Vertical Axis Wind Turbine. In *IOP Conference Series: Earth and Environmental Science* (Vol. 268, No. 1, p. 012060). IOP Publishing. <https://doi.org/10.1088/1755-1315/268/1/012060>
- [8] Al-Ghriybah, M., Zulkafli, M. F., Didane, D. H., & Mohd, S. (2021). The effect of spacing between inner blades on the performance of the Savonius wind turbine. *Sustainable Energy Technologies and Assessments*, 43, 100988. <https://doi.org/10.1016/j.seta.2020.100988>
- [9] Didane, D. H., Anuar, M. A. Z. S., Batcha, M. F. M., Abdullah, K., Ali, M. F. M., & Mohammed, A. N. (2020). Simulation study on the performance of a counter-rotating savonius vertical axis wind turbine. *CFD Letters*, 12(4), 1-11. <https://doi.org/10.37934/cfdl.12.4.111>
- [10] Loutun, M. J. T., Didane, D. H., Batcha, M. F. M., Abdullah, K., Ali, M. F. M., Mohammed, A. N., & Afolabi, L. O. (2021). 2D CFD Simulation Study on the Performance of Various NACA Airfoils. *CFD Letters*, 13(4), 38-50. <https://doi.org/10.37934/cfdl.13.4.3850>
- [11] Al-Ghriybah, M., Zulkafli, M. F., Didane, D. H., & Mohd, S. (2020). Performance of the Savonius Wind Rotor with Two Inner Blades at Low Tip Speed Ratio. *CFD Letters*, 12(3), 11-21. <https://doi.org/10.37934/cfdl.12.3.1121>
- [12] Halmy, M. S. M., Didane, D. H., Afolabi, L. O., & Al-Alimi, S. (2021). Computational Fluid Dynamics (CFD) Study on the Effect of the Number of Blades on the Performance of Double-Stage Savonius Rotor. *CFD Letters*, 13(4), 1-10. <https://doi.org/10.37934/cfdl.13.4.110>
- [13] Frikha, S., Driss, Z., Kchaou, H., & Abid, M. S. (2015). Study of the computational domain effect on the aerodynamic structure around a Savonius wind rotor. *Int. J. Fluid Mech. Therm. Sci*, 1(2), 20-24. <https://doi.org/10.11648/j.ijfmts.20150102.11>
- [14] Loganathan, B., Mustary, I., Chowdhury, H., & Alam, F. (2017). Effect of sizing of a Savonius type vertical axis micro wind turbine. *Energy Procedia*, 110, 555-560. <https://doi.org/10.1016/j.egypro.2017.03.184>
- [15] Lee, J. H., Lee, Y. T., & Lim, H. C. (2016). Effect of twist angle on the performance of Savonius wind turbine. *Renewable Energy*, 89, 231-244. <https://doi.org/10.1016/j.renene.2015.12.012>